



精密小径チャック

BT-ER

PRECISION SMALL BORE COLLET CHUCK



表示方法

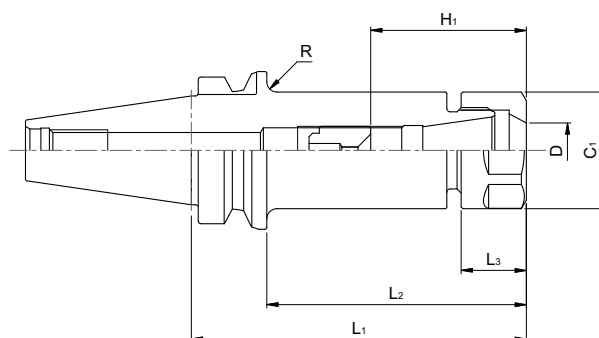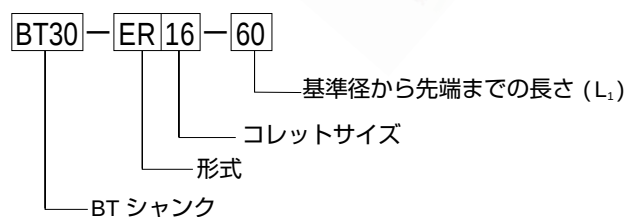

形式番号	D	L ₁	L ₂	R	H ₁	C ₁	L ₃	適合 コレット	締付けトルク (N・m)	適合 スパナ	許容回転速度 (min ⁻¹)
BT30-ER16- 60	3~10	60	38	3	29~ 49	28	17	ER16	30~40	ERS16	10,000
-100		100	78								
-ER20- 60	3~13	60	38	3	34~ 52	34	19	ER20	30~40	ERS20	10,000
-100		100	78								
-ER25- 60	3~16	60	38	0.4	40~ 52	42	20	ER25	30~40	ERS25	10,000
-100		100	78								
BT40-ER16- 70	3~10	70	43	3	22~ 40	28	17	ER16	30~40	ERS16	8,000
-100		100	73		22~ 70						
-160		160	133		22~ 85						
-ER20- 70	3~13	70	43	3	26~ 40	34	19	ER20	30~40	ERS20	8,000
-100		100	73		26~ 70						
-160		160	133		26~130						
-ER25- 70	3~16	70	43	3	29~ 40	42	20	ER25	30~40	ERS25	8,000
-100		100	73		29~ 70						
-160		160	133		29~130						
BT50-ER16-100	3~10	100	62	3	22~ 60	28	17	ER16	30~40	ERS16	8,000
-160		160	122		22~ 85						
-200		200	162								
-ER20-100	3~13	100	62	3	26~ 60	34	19	ER20	30~40	ERS20	8,000
-160		160	122		26~120						
-200		200	162		26~160						
-ER25-100	3~16	100	62	3	29~ 60	42	20	ER25	30~40	ERS25	8,000
-160		160	122		29~120						
-200		200	162		29~160						

・ネジ研：

研磨された細目ネジにより、均等な締付力と同芯度と回転バランスに優れています。